


Maximum Flow	10.5 GPM / 44 lpm
Maximum Pressure	300 PSI / 20 bar
Maximum RPM	550 RPM
Inlet Port - Hose Barb	1-1/4" HB
Outlet Ports - Hose Barb, Valve	(2) 1/2" HB
Bypass - Hose Barb	3/4" HB
Dimensions - ZETA 40E	11"L x 11"W x 12"H
Weight - ZETA 40E	29 lbs

Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

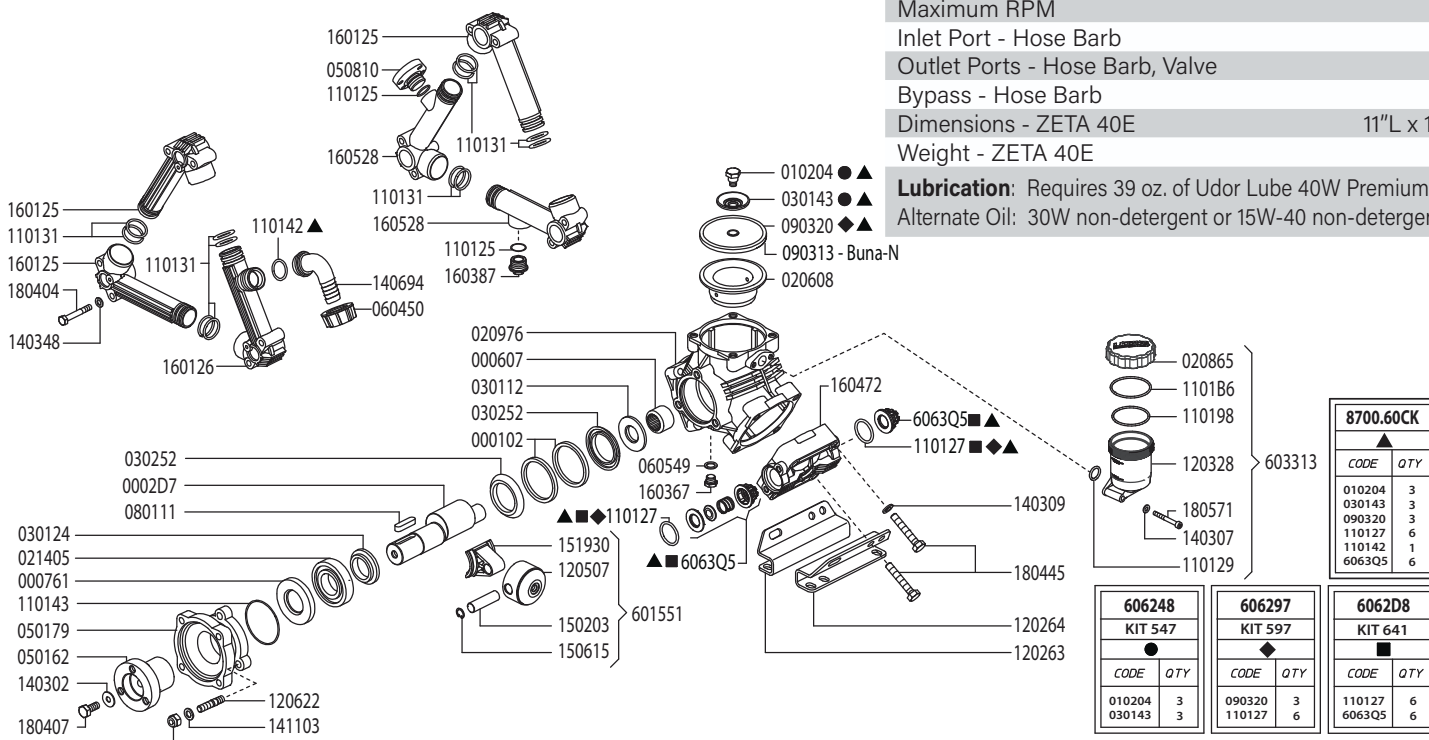

Revised 2-8-2023


Part #	Description	Qty
0001.02	RETAINER RING	2
0002.D7	CRANKSHAFT	1
0006.07	BEARING D25	1
0007.61	OIL SEAL D35	1
0102.04	DIAPHRAGM BOLT ●▲	3
0206.08	PISTON SLEEVE D55	3
0208.65	OIL RESERVIOR CAP	1
0209.76	CRANKCASE	1
0214.05	BALL BEARING D35	1
0301.12	BEARING DISC D25	1
0301.24	BEARING DISC D35	1
0301.43	DIAPHRAGM WASHER ●▲	3
0302.52	ROD SPACER	2
0304.04	NY-LOCK NUT M10	3
0501.62	ADAPTER - VA	1
0501.79	FLANGE - VA	1
0508.10	REGULATOR MOUNTING ADAPTER	1
0604.50	BARB NUT G1-1/2"	1
0605.49	OIL PLUG GASKET	1
0801.11	KEY 10X8X40	1
0903.13	PISTON DIAPHRAGM 100mm,BUNA-N	3
0903.20	PISTON DIAPHRAGM 100mm,GREENTECH ◆▲	3
1101.25	O-RING - PLUG & ADAPTER	2
1101.27	O-RING - VALVE ◆■▲	6
1101.29	O-RING - OIL RESERVIOR	1
1101.31	O-RING - MANIFOLD	12
1101.42	O-RING - INLET BARB▲	1
1101.43	O-RING - FLANGE	1
1101.98	O-RING - OIL RESERVIOR	1
1101.B6	O-RING - OIL RESERVIOR	1
1202.63	MOUNTING RAIL - RIGHT SIDE	1
1202.64	MOUNTING RAIL - LEFT SIDE	1
1203.28	OIL RESERVIOR	1

Part #	Description	Qty
1205.07	ALUMINUM PISTON D55	3
1206.22	STUD M10X46	3
1403.02	WASHER M10	3
1403.07	WASHER M8	2
1403.09	WASHER M10	8
1403.48	WASHER M8	12
1406.94	SUCTION HOSE BARB 1-1/4"	1
1411.03	SERATED WASHER M10	3
1502.03	CONNECTING ROD PIN 15X48	3
1506.15	SNAP RING D15	3
1519.30	CONNECTING ROD	3
1601.25	INLET/OUTLET MANIFOLD TUBE	3
1601.26	SUCTION MANIFOLD TUBE G1-1/2" M	1
1603.67	OIL PLUG G1/4"	1
1603.87	MANIFOLD PLUG G3/4"	2
1604.72	HEAD	3
1605.28	DISCHARGE MANIFOLD TUBE G3/4" F	2
1804.04	HEX BOLT M8X55	12
1804.07	HEX BOLT M10X25	1
1804.45	HEX BOLT M10X60	12
1805.71	ALLEN BOLT M6X50	2
6015.51	PISTON / ROD ASSEMBLY D55	3
6033.13	OIL RESERVIOR ASSEMBLY	1
6063.Q5	VALVE ASSEMBLY W/O O-RING ■▲	6
6062.48	DIAPHRAGM WASHER/BOLT (KIT 547)	1
6062.97	DIAPHRAGM KIT - GREENTECH (KIT 597)	1
6062.D8	INLET/OUTLET VALVE KIT (KIT 641)	1
8700.60CK	COMPLETE REPAIR KIT	1

- Parts in 6062.48 (Kit 547)
- ◆ Parts in 6062.97 (Kit 597).
- Parts in 6062.D8 (Kit 641).
- ▲ Parts in 8700.60CK (Complete Repair Kit)

Maximum Flow	10.5 GPM / 44 lpm
Maximum Pressure	300 PSI / 20 bar
Maximum RPM	550 RPM
Inlet Port - Hose Barb	1-1/4" HB
Outlet Ports - Hose Barb, Valve	(2) 1/2" HB
Bypass - Hose Barb	3/4" HB
Dimensions - ZETA 40E GR	16"L x 11"W x 12"H
Weight - ZETA 40E GR	36 lbs


Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

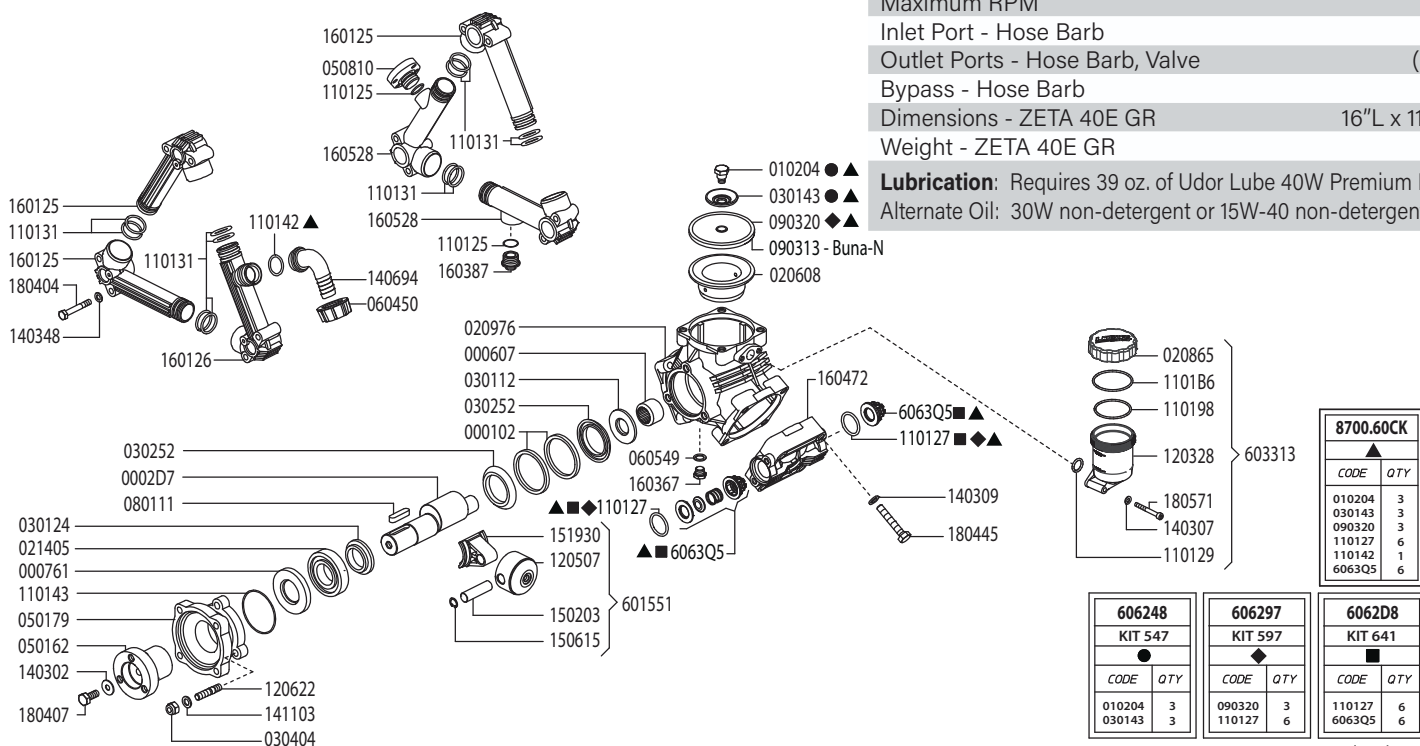

Revised 2-8-2023

Part #	Description	Qty	Part #	Description	Qty
0001.02	RETAINER RING	2	1206.22	STUD M10X46	3
0002.D7	CRANKSHAFT	1	1403.02	WASHER M10	3
0006.07	BEARING D25	1	1403.07	WASHER M8	2
0007.61	OIL SEAL D35	1	1403.09	WASHER M10	12
0102.04	DIAPHRAGM BOLT ●▲	3	1403.48	WASHER M8	12
0206.08	PISTON SLEEVE D55	3	1406.94	SUCTION HOSE BARB 1-1/4"	1
0208.65	OIL RESERVIOR CAP	1	1411.03	SERATED WASHER M10	3
0209.76	CRANKCASE	1	1502.03	CONNECTING ROD PIN 15X48	3
0214.05	BALL BEARING D35	1	1506.15	SNAP RING D15	3
0301.12	BEARING DISC D25	1	1519.30	CONNECTING ROD	3
0301.24	BEARING DISC D35	1	1601.25	INLET/OUTLET MANIFOLD TUBE	3
0301.43	DIAPHRAGM WASHER ●▲	3	1601.26	SUCTION MANIFOLD TUBE G1-1/2" M	1
0302.52	ROD SPACER	2	1603.67	OIL PLUG G1/4"	1
0304.04	NY-LOCK NUT M10	3	1603.87	MANIFOLD PLUG G3/4"	2
0501.62	ADAPTER - VA	1	1604.72	HEAD	3
0501.79	FLANGE - VA	1	1605.28	DISCHARGE MANIFOLD TUBE G3/4" F	2
0508.10	REGULATOR MOUNTING ADAPTER	1	1804.04	HEX BOLT M8X55	12
0604.50	BARB NUT G1-1/2"	1	1804.07	HEX BOLT M10X25	1
0605.49	OIL PLUG GASKET	1	1804.45	HEX BOLT M10X60	12
0801.11	KEY 10X8X40	1	1805.71	ALLEN BOLT M6X50	2
0903.13	PISTON DIAPHRAGM 100mm,BUNA-N	3	6015.51	PISTON / ROD ASSEMBLY D55	3
0903.20	PISTON DIAPHRAGM 100mm,GREENTECH ◆▲	3	6033.13	OIL RESERVIOR ASSEMBLY	1
1101.25	O-RING - PLUG & ADAPTER	2	6063.Q5	VALVE ASSEMBLY W/O O-RING ■▲	6
1101.27	O-RING - VALVE ◆■▲	6	6062.48	DIAPHRAGM WASHER/BOLT (KIT 547)	1
1101.29	O-RING - OIL RESERVIOR	1	6062.97	DIAPHRAGM KIT - GREENTECH (KIT 597)	1
1101.31	O-RING - MANIFOLD	12	6062.D8	INLET/OUTLET VALVE KIT (KIT 641)	1
1101.42	O-RING - INLET BARB▲	1	8700.60CK	COMPLETE REPAIR KIT	1
1101.43	O-RING - FLANGE	1			
1101.98	O-RING - OIL RESERVIOR	1			
1101.B6	O-RING - OIL RESERVIOR	1			
1203.28	OIL RESERVIOR	1			
1205.07	ALUMINUM PISTON D55	3			

- Parts in 6062.48 (Kit 547)
- ◆ Parts in 6062.97 (Kit 597).
- Parts in 6062.D8 (Kit 641).
- ▲ Parts in 8700.60CK

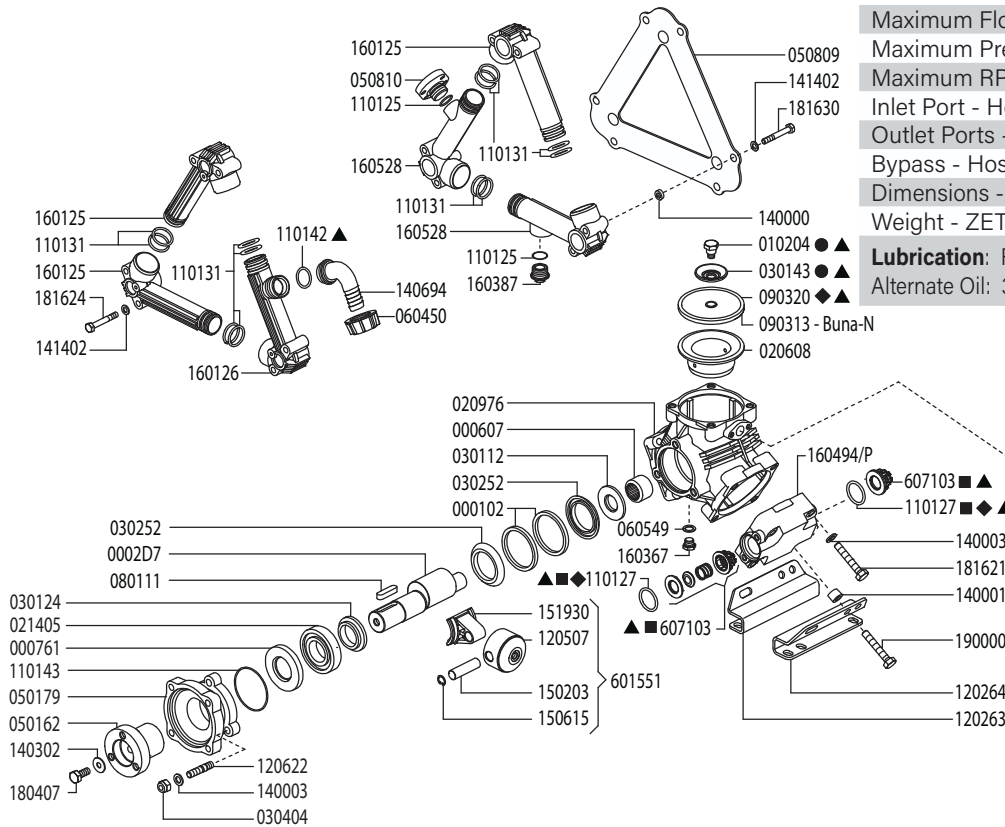

Maximum Flow	10.5 GPM / 44 lpm
Maximum Pressure	300 PSI / 20 bar
Maximum RPM	550 RPM
Inlet Port - Hose Barb	1-1/4" HB
Outlet Ports - Hose Barb, Valve	(2) 1/2" HB
Bypass - Hose Barb	3/4" HB
Dimensions - ZETA 40P	11"L x 11"W x 12"H
Weight - ZETA 40P	29 lbs

Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

603313	
020865	1101B6
110198	120328
190004	140004
110129	
8700.63CK	
CODE	QTY
010204	3
030143	3
090320	3
110127	6
110142	1
607103	6
606248	
KIT 547	
CODE	QTY
010204	3
030143	3
606297	
KIT 597	
CODE	QTY
090320	3
110127	6
6062H1	
KIT 669	
CODE	QTY
110127	6
607103	6

Revised 2-8-2023


Part #	Description	Qty
0001.02	RETAINER RING	2
0002.D7	CRANKSHAFT	1
0006.07	BEARING	1
0007.61	SEAL	1
0102.04	DIAPHRAGM BOLT S.S. ●▲	3
0206.08	PISTON SLEEVE	3
0208.65	OIL RESERVIOR CAP	1
0209.76	CRANKCASE	1
0214.05	BALL BEARING D35	1
0301.12	BEARING DISC D25	1
0301.24	BEARING DISC D35	1
0301.43	DIAPHRAGM WASHER ●▲	3
0302.52	ROD SPACER	2
0304.04	NUT	3
0501.62	ADAPTER - VA	1
0501.79	FLANGE - VA	1
0508.09	DISCHARGE PLATE S.S.	1
0508.10	REGULATOR ADAPTER S.S.	1
0604.50	BARB NUT	1
0605.49	OIL PLUG GASKET	1
0801.11	KEY 10X8X40	1
0903.13	PISTON DIAPHRAGM 100mm,BUNA-N	3
0903.20	PISTON DIAPHRAGM 100mm,GREENTECH ◆▲	3
1101.25	O-RING - PLUG & ADAPTER	2
1101.27	O-RING - VALVE ◆◆▲	6
1101.29	O-RING - OIL RESERVIOR	1
1101.31	O-RING - MANIFOLD	12
1101.42	O-RING - INLET BARB▲	1
1101.43	O-RING - FLANGE	1
1101.98	O-RING - OIL RESERVIOR	1
1101.B6	O-RING - OIL RESERVIOR	1
1202.63	MOUNTING RAIL - RIGHT SIDE	1
1202.64	MOUNTING RAIL - LEFT SIDE	1
1203.28	OIL RESERVIOR	1
1205.07	ALUMINUM PISTON D55	3

Part #	Description	Qty
1206.22	STUD M10X46	3
1400.00	DISCHARGE MANIFOLD SPACER S.S.	6
1400.01	RAIL SPACER S.S.	4
1400.03	HEAD BOLT WASHER S.S.	11
1400.04	WASHER M8 S.S.	2
1403.02	WASHER M10	1
1406.94	SUCTION ELBOW 1-1/4"	1
1414.02	MANIFOLD WASHER S.S.	12
1502.03	CONNECTING ROD PIN 15X48	3
1506.15	SNAP RING	6
1519.30	CONNECTING ROD	3
1601.25	INLET/OUTLET MANIFOLD TUBE	3
1601.26	SUCTION MANIFOLD TUBE G1-1/2" M	1
1603.67	OIL PLUG G1/4	1
1603.87	MANIFOLD PLUG G3/4	2
1604.94/P	HEAD - POLY	3
1605.28	DISCHARGE MANIFOLD TUBE G3/4" F	2
1804.07	HEX BOLT M10X25	1
1900.00	RAIL BOLT S.S.	4
1816.21	HEAD BOLT S.S.	12
1816.24	SUCTION MANIFOLD BOLT S.S.	6
1816.30	DISCHARGE MANIFOLD BOLT S.S.	6
1900.04	ALLEN BOLT M6X50 S.S.	2
6015.51	PISTON / ROD ASSEMBLY D55	3
6033.13	OIL RESERVIOR ASSEMBLY	1
6071.03	VALVE ASSEMBLY 316SS W/O O-RING ◆▲	6
6062.51	DIAPHRAGM WASHER/BOLT (KIT 547)	1
6062.97	DIAPHRAGM KIT - GREENTECH (KIT 597)	1
6062.H1	INLET/OUTLET VALVE KIT (KIT 669)	1
8700.63CK	COMPLETE REPAIR KIT	1

- Parts in 6062.48 (Kit 547)
- ◆ Parts in 6062.97 (Kit 597).
- Parts in 6062.H1 (Kit 669).
- ▲ Parts in 8700.63CK (Complete Repair Kit)

Maximum Flow	10.5 GPM / 44 lpm
Maximum Pressure	300 PSI / 20 bar
Maximum RPM	550 RPM
Inlet Port - Hose Barb	1-1/4" HB
Outlet Ports - Hose Barb, Valve	(2) 1/2" HB
Bypass - Hose Barb	3/4" HB
Dimensions - ZETA 40P GR	16"L x 11"W x 12"H
Weight - ZETA 40P GR	36 lbs

Lubrication: Requires 39 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

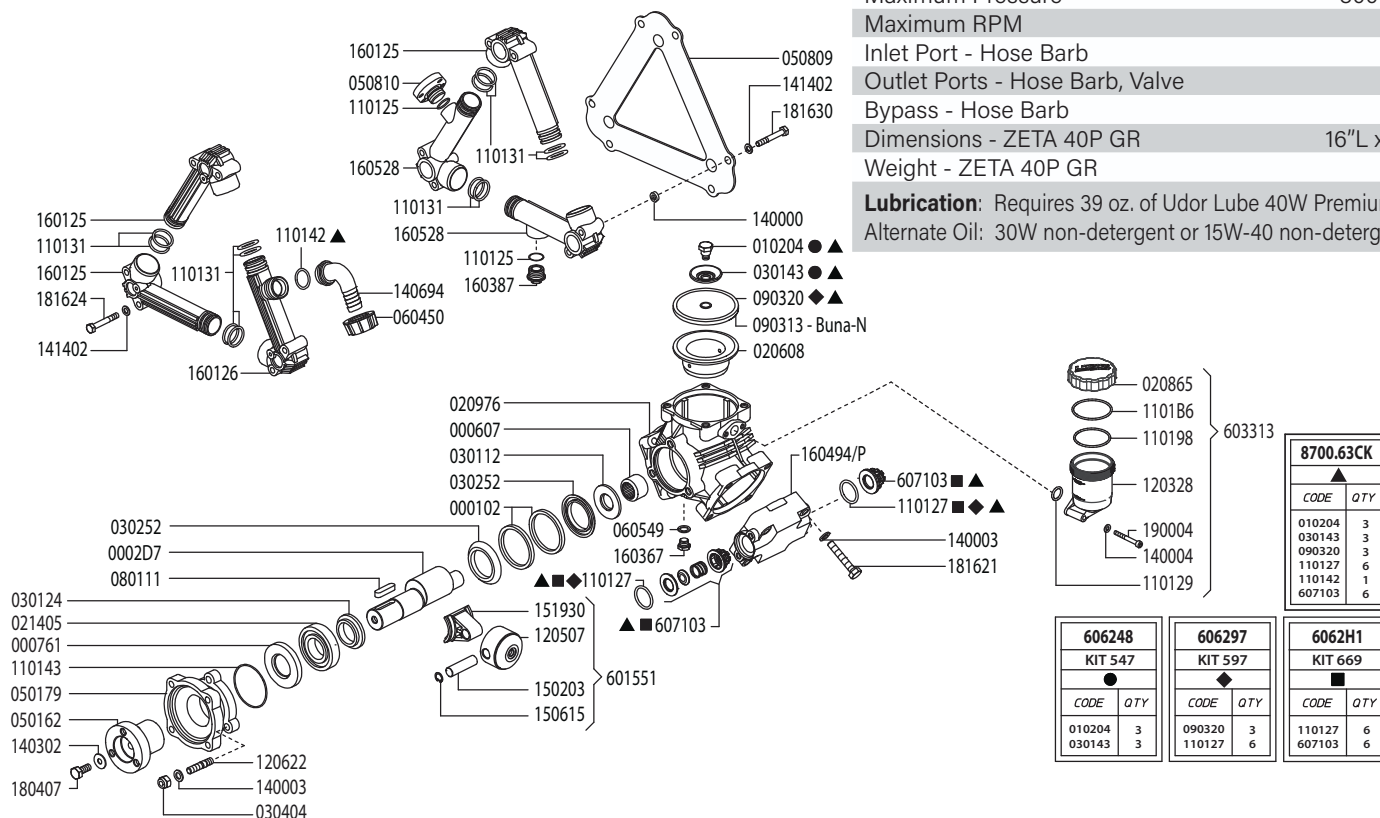

Revised 2-8-2023

Part #	Description	Qty
0001.02	RETAINER RING	2
0002.D7	CRANKSHAFT	1
0006.07	BEARING	1
0007.61	SEAL	1
0102.04	DIAPHRAGM BOLT S.S. ●▲	3
0206.08	PISTON SLEEVE	3
0208.65	OIL RESERVIOR CAP	1
0209.76	CRANKCASE	1
0214.05	BALL BEARING D35	1
0301.12	BEARING DISC D25	1
0301.24	BEARING DISC D35	1
0301.43	DIAPHRAGM WASHER ●▲	3
0302.52	ROD SPACER	2
0304.04	NUT	3
0501.62	ADAPTER - VA	1
0501.79	FLANGE - VA	1
0508.09	DISCHARGE PLATE S.S.	1
0508.10	REGULATOR ADAPTER S.S.	1
0604.50	BARB NUT	1
0605.49	OIL PLUG GASKET	1
0801.11	KEY 10X8X40	1
0903.13	PISTON DIAPHRAGM 100mm,BUNA-N	3
0903.20	PISTON DIAPHRAGM 100mm,GREENTECH ◆▲	3
1101.25	O-RING - PLUG & ADAPTER	2
1101.27	O-RING - VALVE ◆■▲	6
1101.29	O-RING - OIL RESERVIOR	1
1101.31	O-RING - MANIFOLD	12
1101.42	O-RING - INLET BARB▲	1
1101.43	O-RING - FLANGE	1
1101.98	O-RING - OIL RESERVIOR	1
1101.B6	O-RING - OIL RESERVIOR	1
1203.28	OIL RESERVIOR	1
1205.07	ALUMINUM PISTON D55	3

Part #	Description	Qty
1206.22	STUD M10X46	3
1400.00	DISCHARGE MANIFOLD SPACER S.S.	6
1400.03	HEAD BOLT WASHER S.S.	15
1400.04	WASHER M8 S.S.	2
1403.02	WASHER M10	1
1406.94	SUCTION ELBOW 1-1/4"	1
1414.02	MANIFOLD WASHER S.S.	12
1502.03	CONNECTING ROD PIN 15X48	3
1506.15	SNAP RING	6
1519.30	CONNECTING ROD	3
1601.25	INLET/OUTLET MANIFOLD TUBE	3
1601.26	SUCTION MANIFOLD TUBE G1-1/2" M	1
1603.67	OIL PLUG G1/4	1
1603.87	MANIFOLD PLUG G3/4	2
1604.94/P	HEAD - POLY	3
1605.28	DISCHARGE MANIFOLD TUBE G3/4" F	2
1804.07	HEX BOLT M10X25	1
1816.21	HEAD BOLT S.S.	12
1816.24	SUCTION MANIFOLD BOLT S.S.	6
1816.30	DISCHARGE MANIFOLD BOLT S.S.	6
1900.04	ALLEN BOLT M6X50 S.S.	2
6015.51	PISTON / ROD ASSEMBLY D55	3
6033.13	OIL RESERVOIR ASSEMBLY	1
6071.03	VALVE ASSEMBLY 316SS W/O O-RING ■▲	6
6062.51	DIAPHRAGM WASHER/BOLT (KIT 547)	1
6062.97	DIAPHRAGM KIT - GREENTECH (KIT 597)	1
6062.H1	INLET/OUTLET VALVE KIT (KIT 669)	1
8700.63CK	COMPLETE REPAIR KIT	1

- Parts in 6062.48 (Kit 547)
- ◆ Parts in 6062.97 (Kit 597).
- Parts in 6062.H1 (Kit 669).
- ▲ Parts in 8700.63CK (Complete Repair Kit)